


SG-66TG4D 640-665W

N-type TOPCon Solar Double Glass Bifacial Module
Maximum Efficiency 24.6%

Quality Certification



Product Warranty

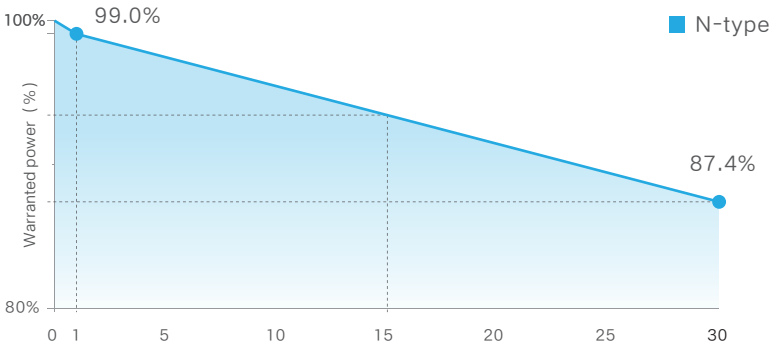

15-year Warranty for Materials and Processing

30-year Warranty for Extra Linear Power Output

First Year Power Degradation<1%

Year 2-30 Power Degradation<0.4%

Power warranty applies at STC condition or only applies to the front side of the module

Product Performance

Lower LCOE

Effectively reduce system BOS costs and shorten the return on investment cycle

Superior Low Irradiation Performance

Higher power output in the morning and evening, cloudy days, haze and other low-light scenarios

Higher Bifacial Factor

The rear power output and generation capacity are 20% and 3.5% higher than PERC, respectively

Non-destructive Laser Cutting Technology

Achieving better cell strength, lower micro-cracks risk for better product reliability


Superior Temperature Coefficient

Generating 1%-2% more power than P-type modules in high temperature regions

Superior Mechanical Load Capacity

Heavy snow load up to 5400 Pa
wind load up to 2400 Pa

Engineering Drawings

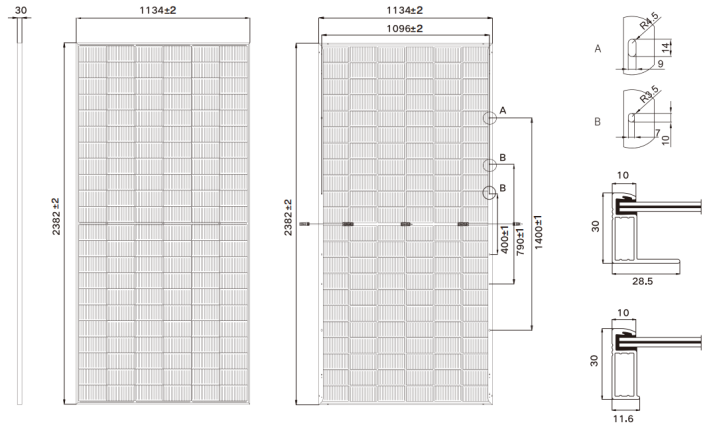

Tolerance: Length: ±2mm Width: ±2mm

Electrical Characteristics

Module Type	SG-66TG4D-640	SG-66TG4D-645	SG-66TG4D-650	SG-66TG4D-655	SG-66TG4D-660	SG-66TG4D-665
Maximum Power Pmax (W)	640	645	650	655	660	665
Voltage at Maximum Power (Vmp/V)	42.6	42.9	43.2	43.5	43.7	43.9
Current at Maximum Power (Imp/A)	15.06	15.08	15.10	15.12	15.14	15.16
Open Circuit Voltage (Voc/V)	50.80	51.10	51.40	51.70	52.00	52.30
Short Circuit Current (Isc/A)	15.98	16.00	16.02	16.04	16.06	16.08
Module Efficiency (%)	23.7	23.9	24.1	24.2	24.4	24.6
Pmax/Voc/Isc Tolerance	±3%		Maximum System Voltage		DC1500V	
Maximum Series Fuse Rating	30A		Operating Temperature		-40°C~+70°C	
Fire Rating	Class C		Power SortingTolerance		-5~+10W	

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Maximum Power Pmax (W)	704	710	715	721	726	732
Voltage at Maximum Power (Vmp/V)	42.6	42.9	43.2	43.5	43.7	43.9
Current at Maximum Power (Imp/A)	16.57	16.59	16.61	16.63	16.65	16.68
Open Circuit Voltage (Voc/V)	50.80	51.10	51.40	51.70	52.00	52.30
Short Circuit Current (Isc/A)	17.58	17.60	17.62	17.64	17.67	17.69
aBSI(A)	19.53	19.56	19.58	19.60	19.63	19.65
Pmax/Voc/Isc/aBSI Tolerance	±3%					
Bifaciality Coefficient	φVoc: 100±3 %, φIsc: 80±10 %, φPmax: 80±10 %					


BNPI: Irradiance Front 1000W/m², Rear 135W/m² Cell Temperature 25°C, AM=1.5
aBSI: Irradiance Front 1000W/m², Rear 300W/m² Cell Temperature 25°C, AM=1.5

Mechanical Characteristics

Cell Type	N- type mono-crystalline
Cell Orientation	132 (6 x 22)
Dimension	2382 x 1134 x 30mm
Weight	32.4kg
Glass	Dual glass, 2.0mm+2.0mm semi-tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68 rated
Output Cables	4mm², 1200mm(+)/1200mm(-) or customized length
Connector Type	Z4S-abcd(Zerun)/PV-ZH202B(Zhonghuan)/PV-HT03x(Haitian)/QC4.10-cds(QC Solar)
Mechanical Load	+5400Pa / -2400Pa

Sungrow Renewables Development Co., Ltd

I-V and P-V Curves Temperature: (25 ± 2) °C

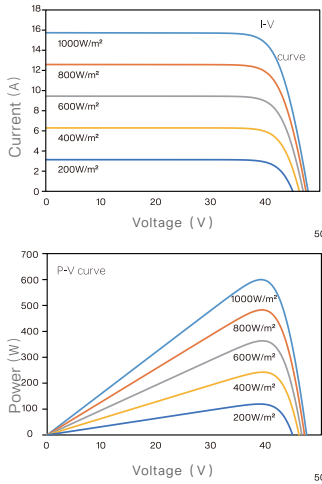

Temperature Characteristics

Temperature Coefficients of Pmax	-0.30%/°C
Temperature Coefficients of Voc	-0.25%/°C
Temperature Coefficients of Isc	0.046%/°C
Temperature Rating [T98]max	70°C

Packaging Configuration

Pallet Dimension	2396 x 1110 x 1251 mm
Packing Detail	36 pcs/pallets, 72 pcs/stack, 720 pcs/ 40'HQ container

*Specifications included in this datasheet are subject to change without notice. Sungrow Renewables reserves the right of final interpretation.